


1. SmpTest0PG.xml click button. Forward to SmpTestPG.xml

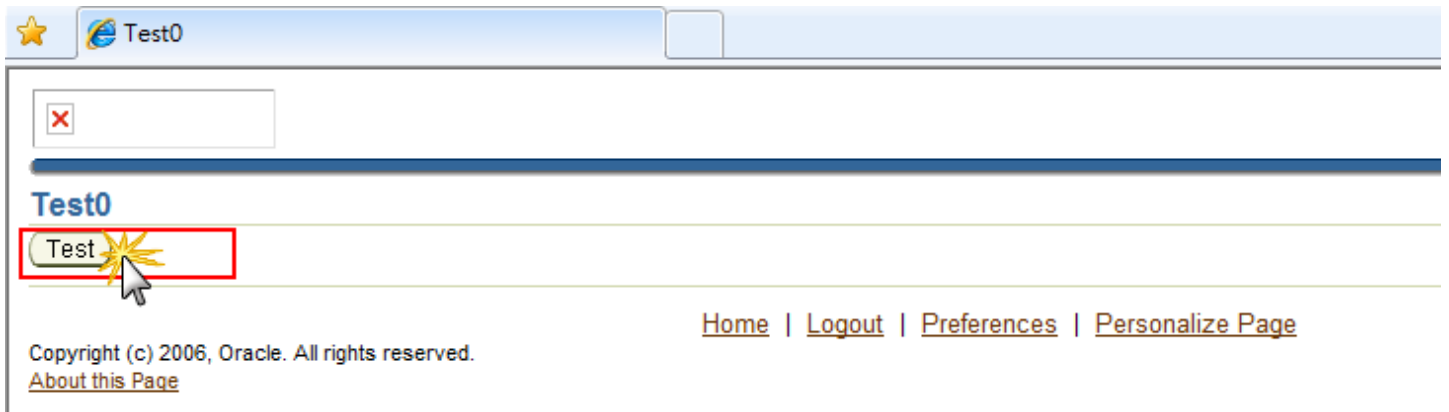

2. SmpTestPG.xml Show Data.

**My Test**

Personalize Header: (PoHeader)

HeaderID	21
DocNum	200

SmpPoHdVO

Personalize Table: (SmpPoDIVO)

Show All Details | Hide All Details

Details	LineId	LineNum	HeaderId	ItemNo	Qty
Hide	22	2	21	DELL	200

No Data Show

LineLocationId	ShipmentNum	LineId	HeaderId	Qty
No results found.				
Add Another Row				

SmpPoDIVO

Hide	21	1	21	HP	100
------	----	---	----	----	-----

No Data Show

LineLocationId	ShipmentNum	LineId	HeaderId	Qty
No results found.				
Add Another Row				



SmpPoDkVO

Personalize Table: (SmpPoDkVO1)

LINE_LOCATION_ID	ShipmentNum	LINE_ID	HEADER_ID	Qty
22	2	21	21	20
21	1	21	21	10

- SmpPoHdVO Master ViewObject
- SmpPoDIVO Detail ViewObject
- SmpPoDkVO Detail-Detail ViewObject
- We use programming insert row ViewObject.
- Why the SmpPoDkVO1 Reagin have show data, but SmpPoDkVO Reagin not show data.

# AM Setting

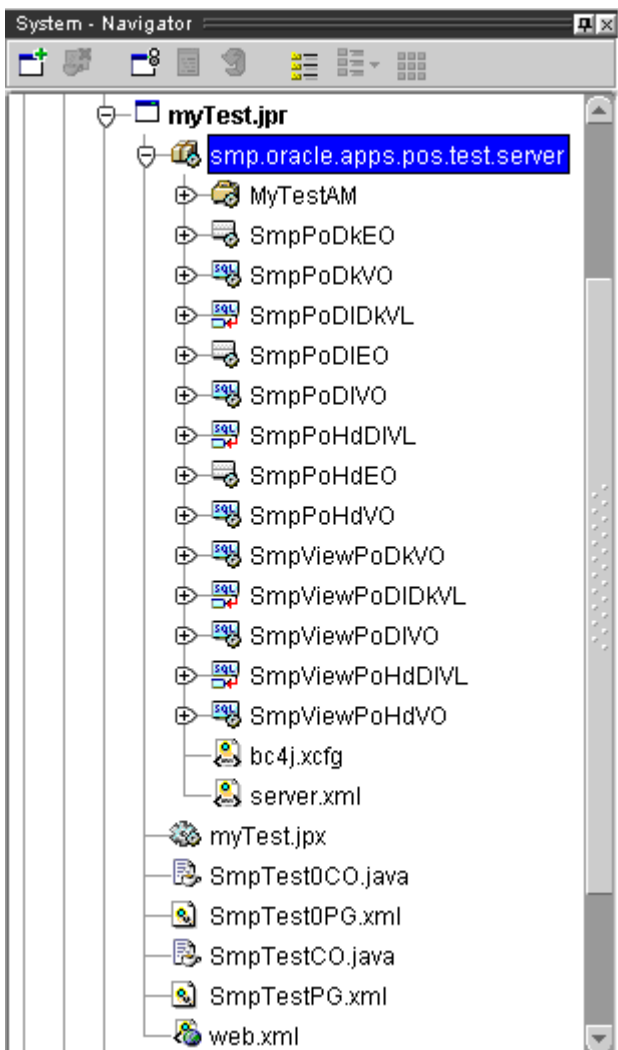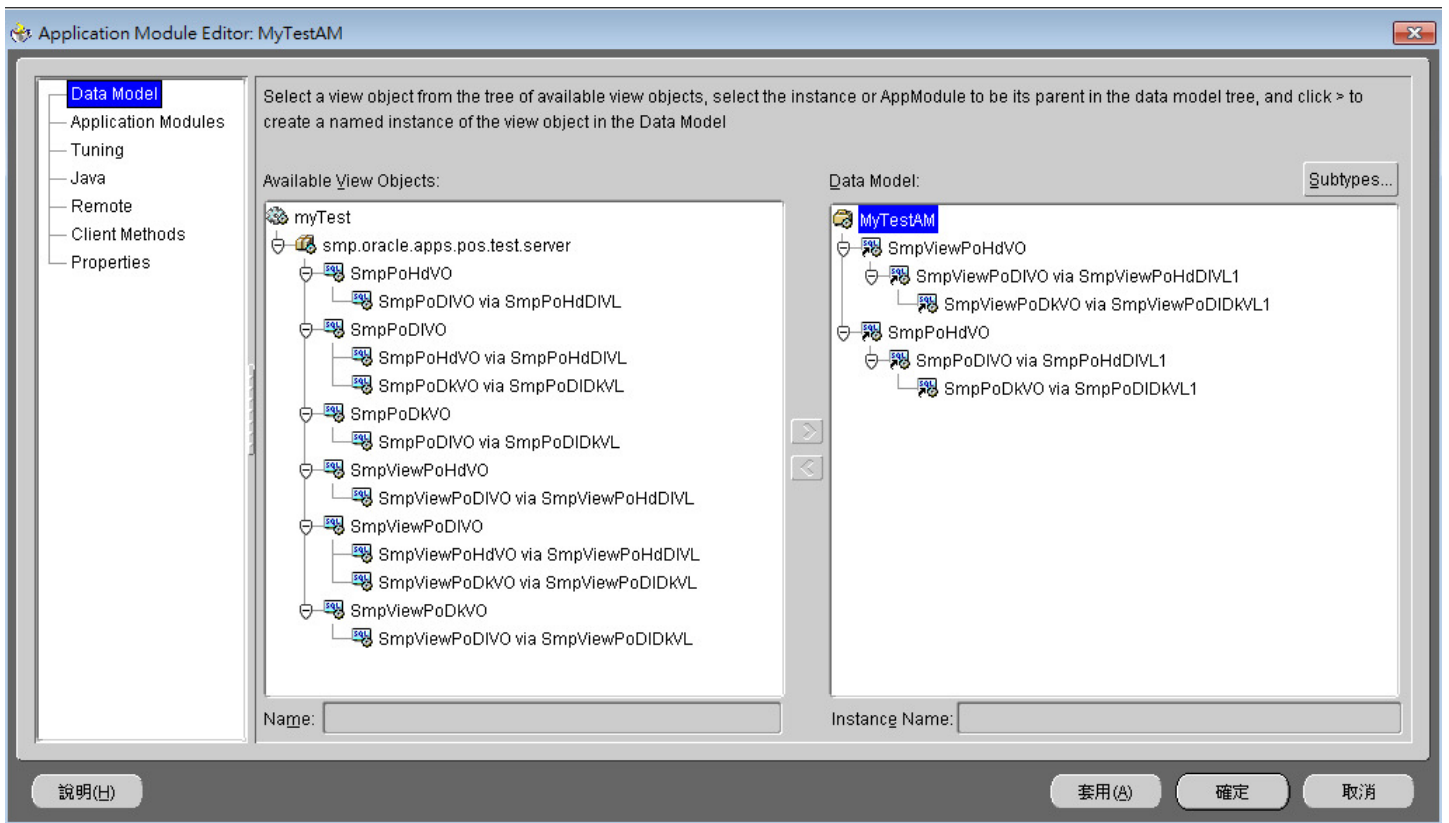

The screenshot displays an IDE interface with three main panels:

- Structure Panel (Left):** Shows a tree view of the project structure. The selected component is `SmpPoDIVO`, which is a table component with columns: `LINE_ID`, `LineNum`, `HEADER_ID`, `ItemNo`, and `Qty`. It also includes a `table Components` section with a `detail` section containing `PoShipment` and `SmpPoDKVO` (with columns `LINE_LOCATION_ID`, `ShipmentNum`, `LINE_ID1`, `HEADER_ID1`, and `Qty1`).
- Code Editor (Middle):** Shows Java code for `SmpTestCO` extending `OAControllerIm`. The code includes imports for `java.io.Serializable`, `oracle.apps.fnd.framework.webui.OADial`, `oracle.apps.fnd.framework.webui.beans`, `oracle.apps.fnd.framework.OAException`, `oracle.jbo.RowSet`, `oracle.jbo.Row`, `oracle.jbo.RowIterator`, `oracle.apps.fnd.framework.OARow`, and `oracle.cabo.ui.UIConstants`. A comment indicates it is a controller for a table. The `processRequest` method is partially visible.
- Property Inspector (Right):** Shows the properties for `SmpPoDIVO`. The `Detail View Attr...` property is highlighted with a red box and set to `Viewshipments`. Other properties include `ID` (SmpPoDIVO), `Region Style` (table), and `Rendered` (True).

The status bar at the bottom shows the file path: `D:\Jdev\OAF\jdevhome\jdev\myprojects\smp\oracleapps\pos\test\testwebui\SmpTestPG.xml`.